

Offshore

The anode you need for your Offshore solutions


TiMMo anode active on approximately 1m²

In test, Delivers 15A under 4V

Recommended optimization: 15A

Up to 50 A/m² for 20 years

Delivered on a solidarity pallet, weighted,
intended to placed at sea or suspended...

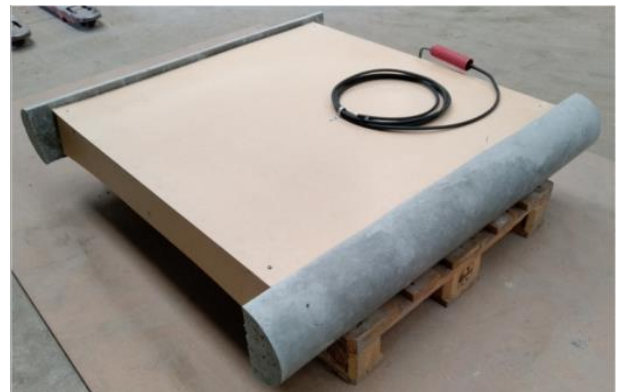

To be defined and optional:

Durability

Usage instructions

Positioning advice

Conditioning

Within 4 to 8 weeks

Commercial conditions on request